



Perfecting Acoustics in Every Space!

Acoustic Products
Catalogue

www.sonidoa.com






Bring harmony to your space

Being constantly surrounded by noise has an impact on our social behaviour, and could lead to social isolation and negative emotions such as rage and frustration.



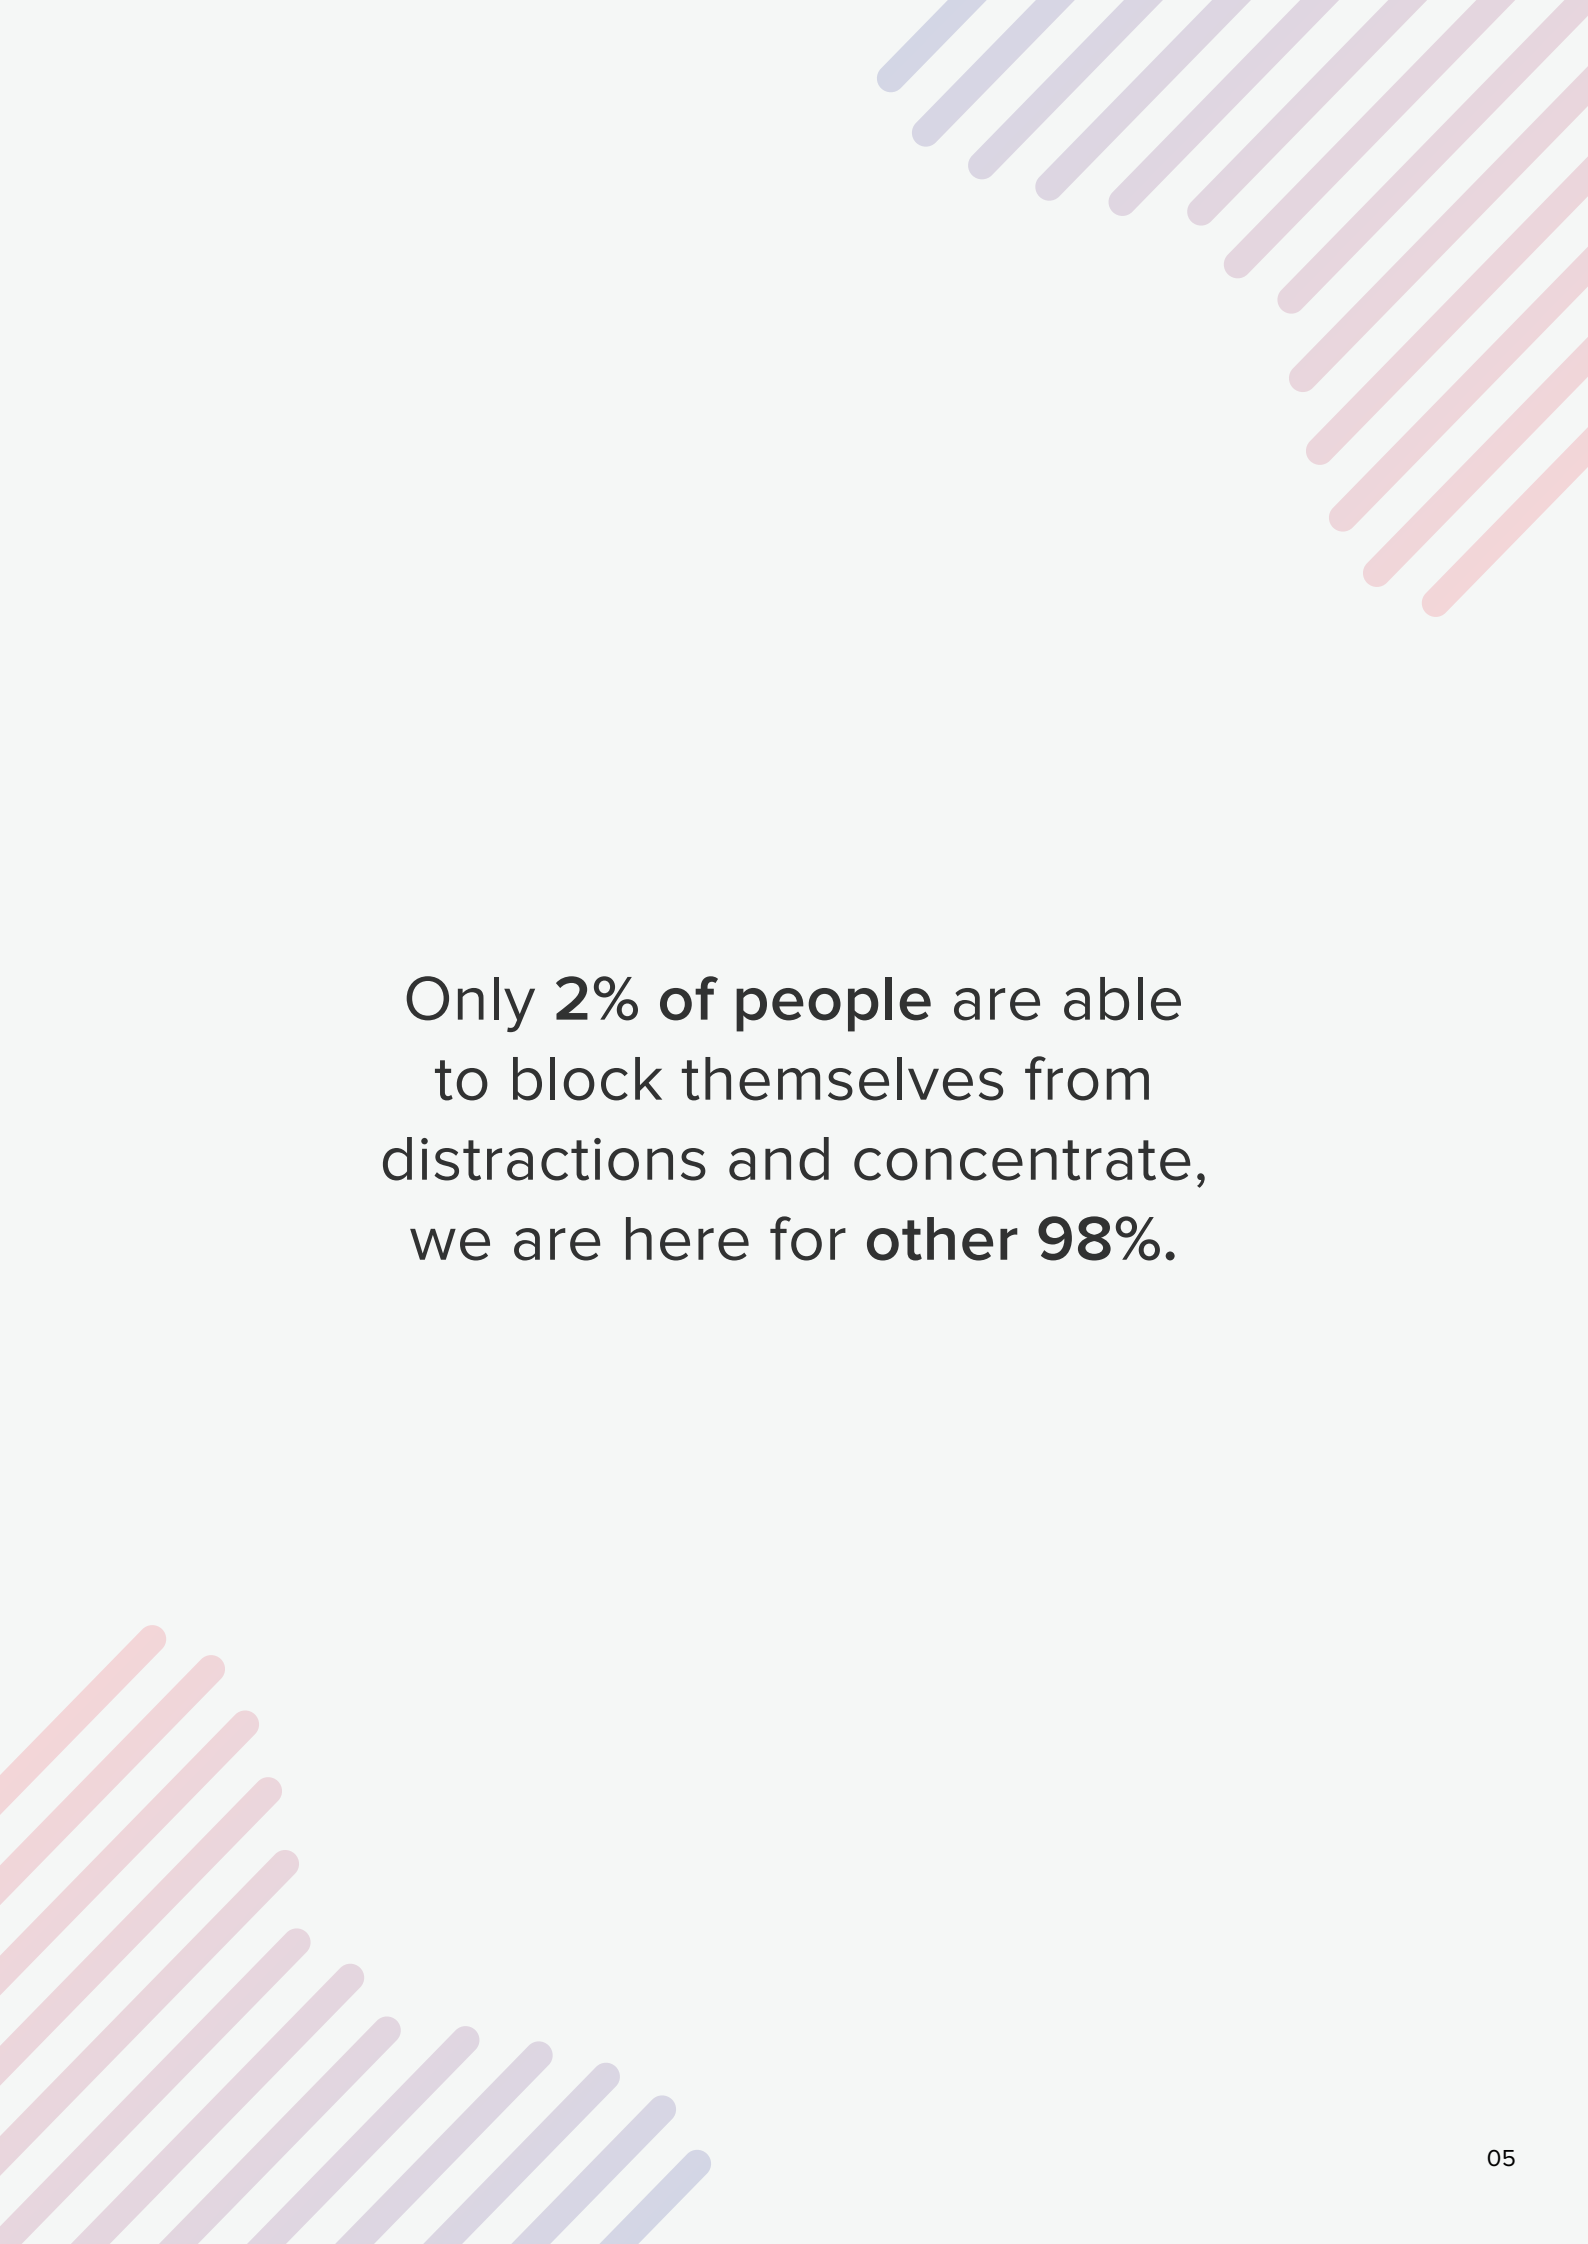

Only **2% of people** are able
to block themselves from
distractions and concentrate,
we are here for **other 98%**.





All you need to make your workspace agile and acoustic friendly.

Excessive noise levels are linked to irritability and stress and a result reduction in performance and concentration on the part of employees.

Acoustic comfort is one of the factors that has the greatest impact on employee health and wellbeing.





Enjoy the peace and quiet

Help maintain concentration, Increase
creativity, Promote cognition and learning.

Sustainability

Sonidoa polyester fibre acoustic panel is made from 100% polyester fibre.

It is a newly developed product through high temperature and needle perforation. The whole production process is completely physical and eco-friendly, no waste water, emissions, waste, no adhesive, this allows the panel to support a safer indoor air quality.

Our mission is to make great efforts to provide one-stop service of professional acoustic solutions, create more environmentally friendly and comfortable working, living spaces, let people enjoy a healthy life.



Manufacturing process of Sonidoa products



Bottles made from PET identified by  are collected from consumers.




Contaminants like lids and sticky labels are removed. Bottles are chipped into tiny pellets.



Pellets are washed and sanitised.



Pellets and colour are fed into a hopper. A heater at the base of the hopper melts the pellets to form a free-flowing resin.



Resin is pumped through a sophisticated shower-rose device, known as a Spinneret.



Cold air fans 'set' the fine fibres extruded from the Spinneret.



Fibres are drawn and cut, then blended into a web.



Web is compressed to make board ready for use.



Hearing Your Needs

Sonidoa has been a genuine specialist in interior acoustics since day one. Our in-house sound experts work tirelessly to bring your conversations to a higher level. Our very own sound lab brings the guarantee of product performance through rigorous testing.

Finally, our user-friendly App is ready to help you design a sound working environment.



Technical Specs:

Fire Rating (BS EN 13501-1:2018)

Fire Rating - A2


Classification	Definition	Description
A1	Non-combustible	No contribution to fire
A2	Limited combustibility	Very limited contribution to fire
B		Limited contribution to fire
C		Minor contribution to fire
D	Combustible	Medium contribution to fire
E		High contribution to fire
F		Easily flammable

Smoke Rating - S1

Classification	Level	Description
Smoke emission during	S1	Quantity/speed of emission absent or weak
Combustion	S2	Quantity/speed of emission of average intensity
	S3	Quantity/speed of emission of high intensity

Droplet Rating - D0

Classification	Level	Description
Production of flaming	D0	No Dripping
Droplets during	D1	Low dripping
Combustion	D2	High dripping

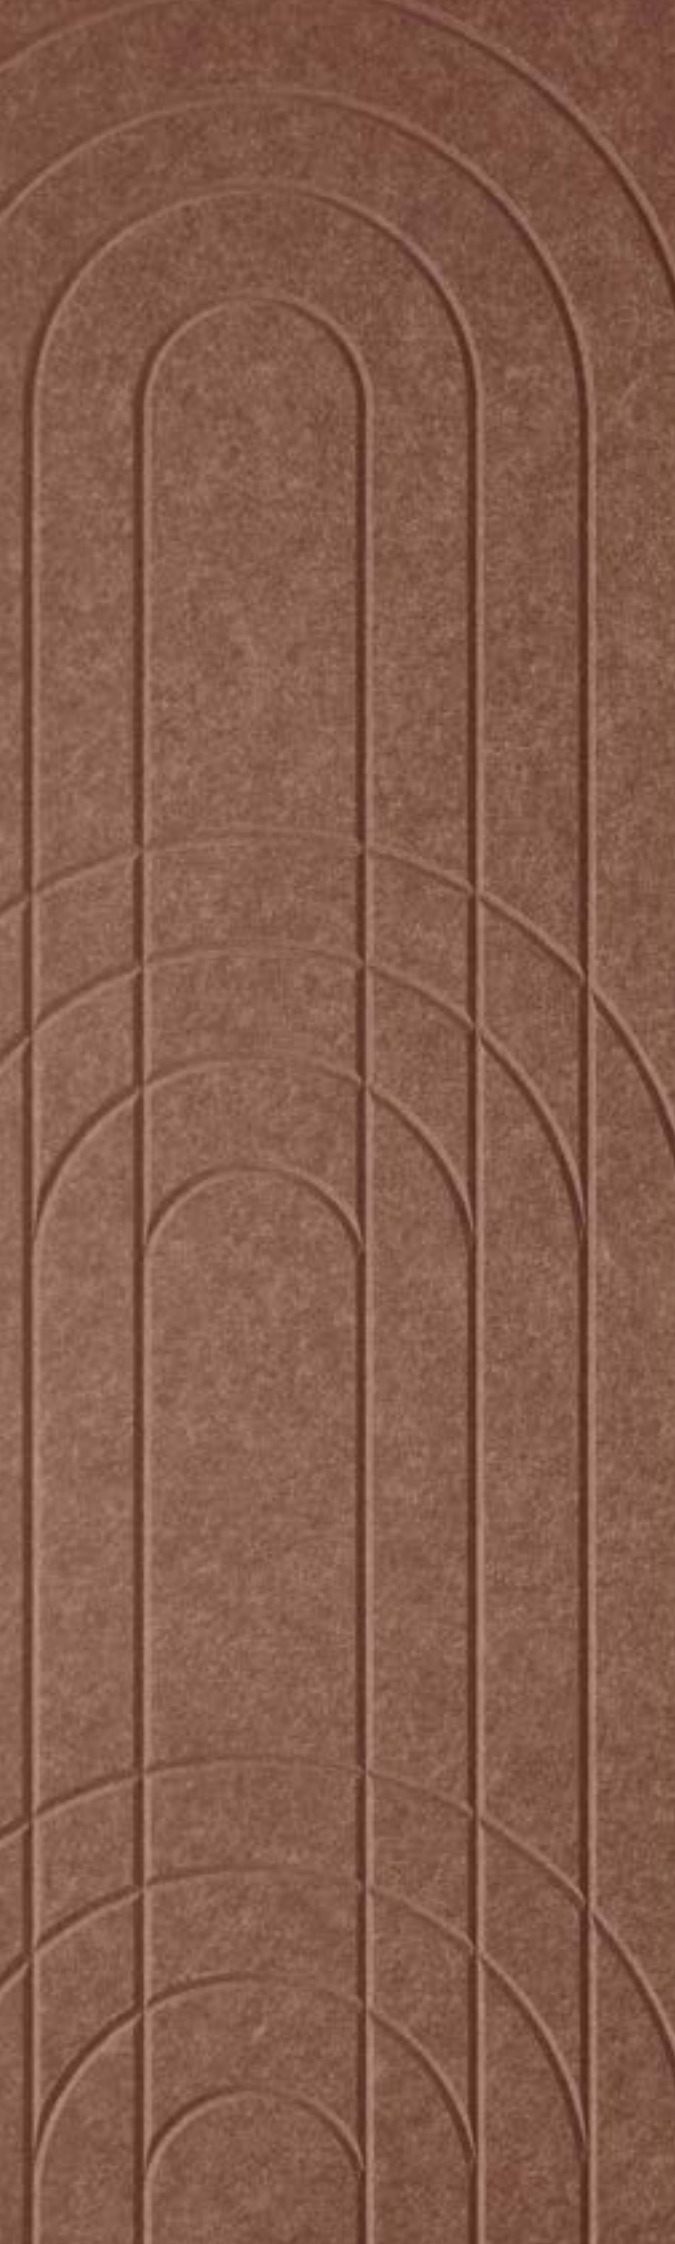

Composition:

100% polyester fibre from Polyethylene terephthalate (PET). Lanes contains a minimum of 60% previously recycled polyester fibre.

Color Fastness to Rubbing:

ISO 105-X12:2016

Dry Rating: 4-5 (Highest = 5)

Wet Rating: 4-5 (Highest = 5)

Color Fastness to Light:

Sonidoa material is suitable for indoor use only. Light fastness is dependent on use and exposure. Sonidoa material has been evaluated to the following standard ISO 105-BO2:2014.

Rating: 6 (Highest = 7)

Pattern Repeat:

Non-woven. No pattern repeat but product has directional grain. Product may vary from samples and batch to batch due to fiber blending and lay-up, which is an inherent feature of this product.

Microbial Resistance:

ASTM G21-15

Growth Rating: 0 (No growth)

Sonidoa material does not promote the growth of molds and mildew.

VOC Emissions:

Sonidoa Acoustics polyester has been tested for chemical emission in accordance with ASTM D5116 and is considered a low VOC product.

VOC concentration: 0.009 mg/m³ (7days) material does not promote the growth of molds and mildew.

NRC Rating (GB/T 20247-2006/ISO 354:2003):

0.78 (50mm air cavity and 12mm with 1.7kg/m² density)

Density:

9mm x 1220mm x 2440mm (0.35" x 4.00' x 8.00'), 1750 GSM
12mm x 1220mm x 2440mm (0.47" x 4.00' x 8.00'), 2400 GSM



Benefits with Sonidoa

In pursuit of the perfect conversation

As pioneers of the acoustic world, we create products for friendly and rewarding conversations in busy spaces. Our solutions combine top acoustic performance with timeless design.

- Improve comfort through visual means.
- High-quality materials.
- Top-notch prints and stunning interior fabrics.
- Sonidoa acoustic boards and products are suitable for any space.
- Our in-house designed aluminium profiles enable interchangeable picture surfaces, various mounting possibilities and even large sizes.

Product Line



Wall

Wall Panels	Pg. 20
Wall Tiles	Pg. 28
3D Wall Tiles	Pg. 38
Wall Block Tiles	Pg. 48
Fluted Panels	Pg. 54



Ceiling

Ceiling Tiles	Pg. 62
3D Ceiling Tiles	Pg. 68
Ceiling Baffles	Pg. 74
Ceiling Lattice	Pg. 82
Ceiling Rafts	Pg. 88



Privacy Screens

Privacy Desk Screen	Pg. 94
Movable Privacy Screen	Pg. 100
Standing Privacy Screen	Pg. 106
Suspended Privacy Screen	Pg. 112



Lighting

Pg No. 118



Furniture

Pg No. 132



Home Decor

Pg No. 138



Bespoke

Pg No. 144



Sound Absorbers

Pg No. 150



WALL PANELS



Cubipolics

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Sea Beast

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Inline Walls

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Duress

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Oblique

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Sumup

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Crystals

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

WALL TILES





Flex Rosa

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Aurora

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Mirage

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Percis

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Aslant

Process	CNC
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Magnitude

Process	CNC
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Allure

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Sapphire

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Reed

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance


Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



3D WALL TILES

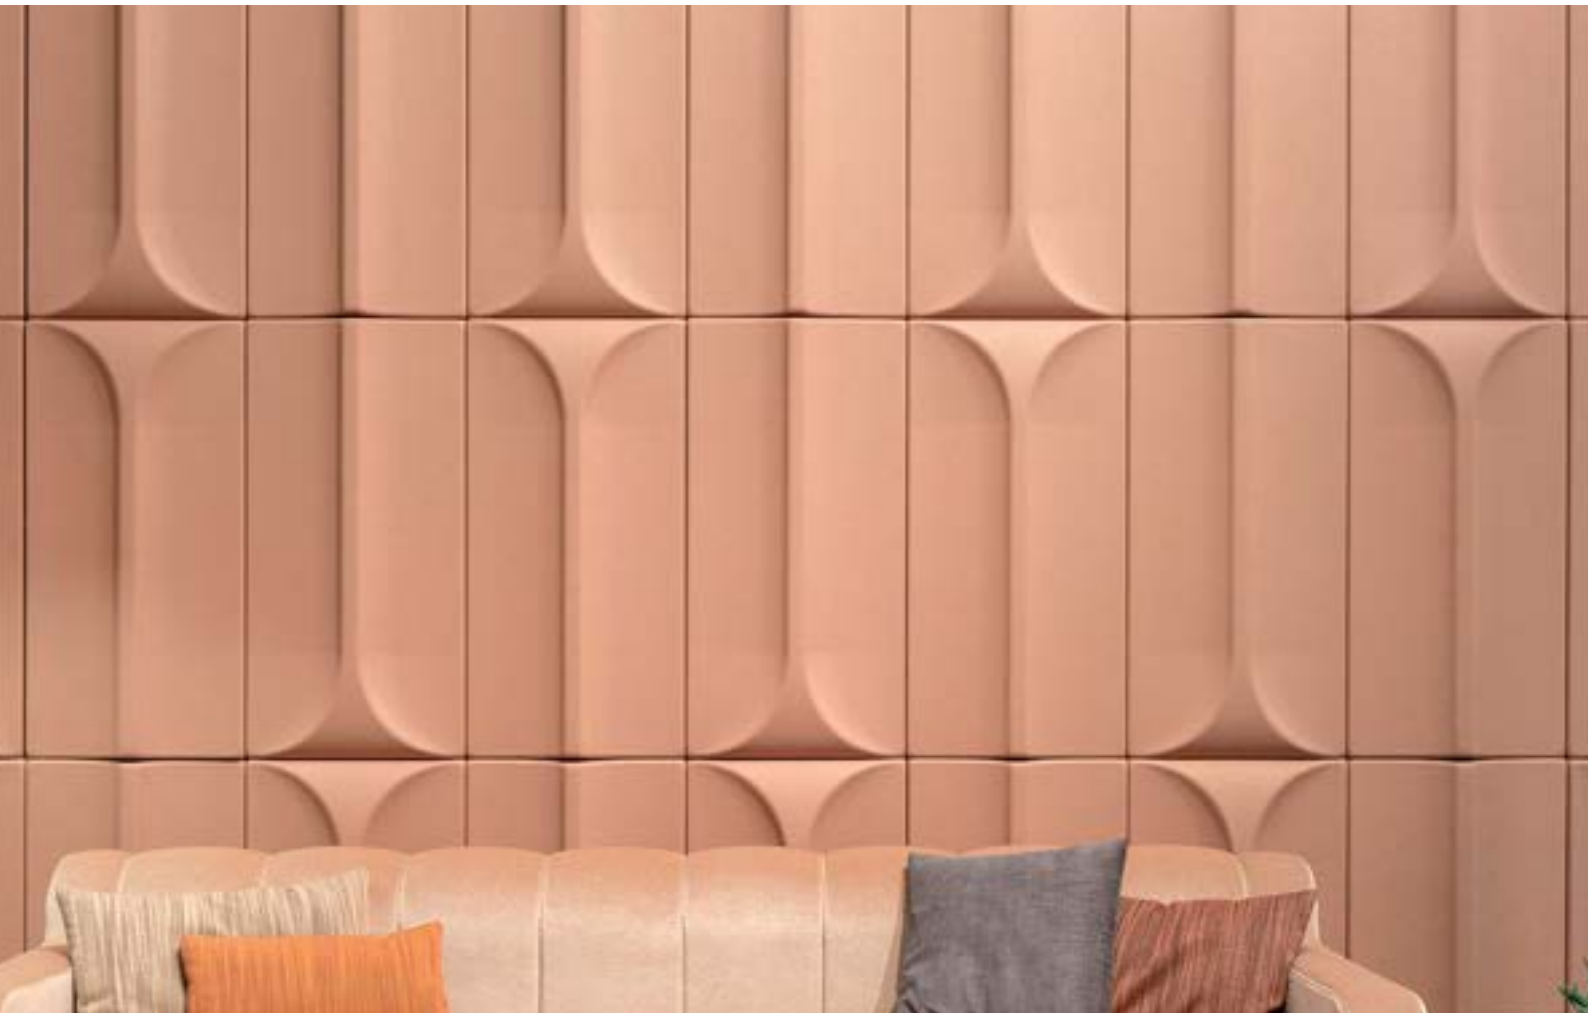

Mega Dile

Process	Thermoforming
Standard Size	Height: 90, Width: 45, Depth: 6
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Limerick

Process	Thermoforming
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Lump

Process	Thermoforming
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Cork Wall Tiles

Process	Thermoforming
Standard Size	Height: 42, Width: 50, Depth: 6
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Wings-Fly

Process	Thermoforming
Standard Size	Height: 65, Width: 65, Depth: 6
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Frisson

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Trump

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Paragon

Process	Thermoforming
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Doozer

Process	Thermoforming
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



WALL
BLOCK
TILES



Jumbo-Hooks

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Recti-Bricks

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Recks

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Hexa Cork

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Giant

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

FLUTED PANELS





Satvario

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Peak

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Rio

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Michel-Angelo

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Calacatta Panzo

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Ginepro

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Obax

Process	CNC
Standard Size	2400mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	21mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



CEILING TILES



Squara

Process	CNC
Standard Size	1190mm x 595mm x 20mm 595mm x 595mm x 15mm 595mm x 595mm x 20mm 595mm x 595mm x 25mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Matrix

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Trilinear

Process	CNC / Thermoforming
Standard Size	1190mm x 595mm x 20mm 595mm x 595mm x 15mm 595mm x 595mm x 20mm 595mm x 595mm x 25mm
Density	1750 GSM , 2400 GSM
Thickness	CNC: 9mm, 12mm (Customize 18mm, 24mm Thermforming: 4mm, 6mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Pulse

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Fern

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

A modern living room featuring a ceiling with a complex, 3D geometric pattern of white tiles. The tiles are arranged in a grid-like fashion, creating a textured, crystalline appearance. The room includes a large, white, curved sectional sofa, a round wooden coffee table with a few books and decorative objects, and a large window overlooking a city skyline. The lighting is soft and even, highlighting the intricate details of the ceiling tiles.

3D CEILING TILES



Contra

Process	Thermoforming
Standard Size	600mm x 600mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Flora

Process	Thermoforming
Standard Size	575mm x 575mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Nordic

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Subtle

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Crate

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

CEILING BAFFLES



Cambridge

Process	CNC
Standard Size	1016mm, 1219mm, 1828mm, 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Aqua Wave

Process	CNC
Standard Size	2400mm x 297mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Node

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Array

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Globue

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Geostripe

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Fluted

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



CEILING LATTICE



Libra Edge

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Path Waves

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Arena

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Plusness

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Raffle

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

CEILING RAFTS





Cardics

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Nurosys

Process	CNC
Standard Size	638mm x 1250mm 638mm x 1650mm 1088mm x 1250mm 1088mm x 1650mm
Density	1750 GSM , 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Hora Trays

Process	Thermoforming
Standard Size	Length: 560mm, Width: 1160mm, Depth: 90mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Alpha

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Cluster

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

PRIVACY DESK SCREEN





Durability Space Divider

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Sound Sculpture

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Cloud Mates

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Flexa

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Retreat

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

MOVABLE PRIVACY SCREEN





UV Blue

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Croods

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Echolex

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Pixie

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Zelta

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

STANDING PRIVACY SCREEN





Linguistic

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Unfist

Process	Thermoforming
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Glider

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Nexus

Process	CNC
Standard Size	1045x1400mm 1045x1800mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Flake


Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



SUSPENDED PRIVACY SCREEN



Swaibs

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Diminish

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Parahex

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Dura Winds

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Snuff

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

LIGHTING





Trammy

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Basin

Process	Thermoforming
Standard Size	Length: 940mm, Width: 2997mm, Depth: 1473mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Dexen

Process	Thermoforming
Standard Size	2400mm x 102mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Breeze

Process	Thermoforming
Standard Size	2400mm x 102mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Fallon

Process	CNC
Standard Size	530mm x 330mm 880mm x 440mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Aella

Process	CNC
Standard Size	Length: 500mm, Width: 750mm, Depth: 1000mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Flott

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Tranquil Tone

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Pac Slime

Process	Thermoforming
Standard Size	Height: 989mm, Width: 1046mm, Depth: 762mm
Density	1750 GSM, 2400 GSM
Thickness	4mm, 6mm
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Quora

Process	CNC
Standard Size	200mm x 200mm x 200mm, 400mm x 300mm x 400mm, 400mm x 400mm x 400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Curricular

Process	CNC
Standard Size	785mm × 785mm × 550mm 985mm × 985mm × 690mm 1185mm × 1185mm × 830mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Gamma

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Nova

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



FURNITURE



Triflex

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Column Vases

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Twik

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Bloom

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Nest

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



HOME DECOR





Ketty

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Meta Rose

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Celesti Vibes

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Quarry

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Puka

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



BESPOKE



Bazel

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Norm Trees

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Ora-Leaf

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Avera Leaf

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Raptor

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

SOUND ABSORBER





Trail

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Pilgrims

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Lincoln


Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.

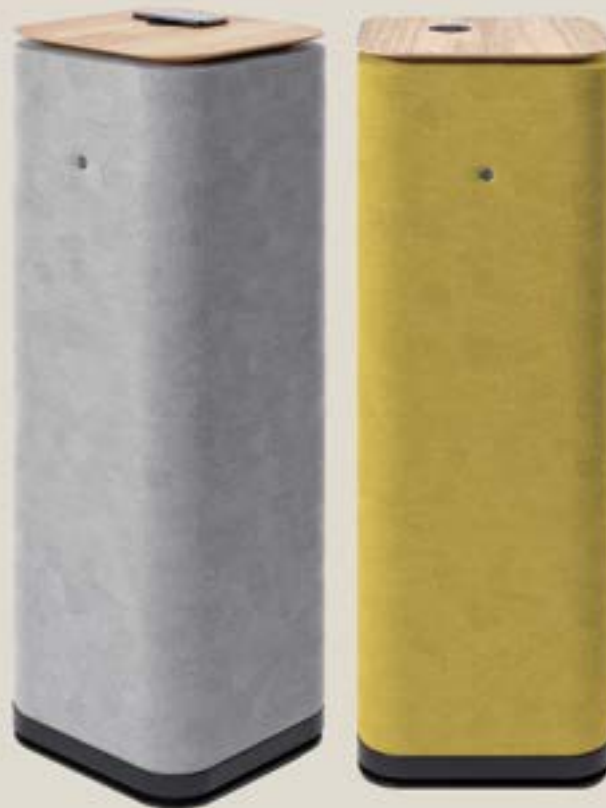

Miser

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



Celpsdra

Process	CNC
Standard Size	1200mm x 2400mm
Density	1750 GSM, 2400 GSM
Thickness	9mm, 12mm (Customize 18mm, 24mm)
Content	100% Polyester Fiber (PET)
Color Options	Please check latest shadecard
Custom	Personalisation and bespoke options available
Lead Time	Made to order and certain lead times will apply
Installation	Please refer Installation Manual
Durability	5 Years
Environmental	60% post-consumer recycled content, 100% recyclable, contains no formaldehyde, 100% VOC free, no chemical irritants, and free of harmful substances
Colorfastness to Light	Class 4–5 (40 hours)
Flammability	Test reports available upon request
Acoustics	Test reports available upon request

Maintenance

Vacuum occasionally to remove general air-borne debris. Should soiling occur, spot clean with mild soap and lukewarm water.

Variation

Color variation is evidence of the manufacturing process of the material. Product color is only indicative, as it is not possible to assure consistency of color due to the deliberate mixture of colors in the dyed fibers. Color matching cannot be guaranteed on shipments and variation will be more pronounced beyond the normal commercial range.



sonidoa

PRECISION CUT PANELS

INSTALLATION GUIDE



This guide is presented in good faith to assist in the installation of Sonidoa Precision Cut Panels. It is not intended as an all-encompassing guide, and a professional qualified installer is recommended for optimum results.

Sonidoa accepts no responsibility for installation actions taken or not taken. Please refer to Sonidoa Terms of Trade.

This installation guide contains only recommendations; if you have any questions about installation techniques please contact your distributor or Sonidoa sales representative.

PLEASE NOTE:


- Allow for thickness variations due to manufacturing tolerances and any minimal unevenness of substrate.
- Exact colour matching cannot be guaranteed between batches.
- Fibre mix and surface texture may vary.
- Please check that all panels are the correct design, colour, shape and batch number (if requested).
- Sonidoa Panel has an inherent grain direction. Stickers with the Sonidoa logo are placed in the same corner of each plain panel to assist with correct panel orientation.
- No claims will be accepted after panels are installed.
- Ensure appropriate work safety regulations are met, e.g. protective clothing, eyewear and respiratory equipment.

HANDLING & STORAGE


Carry boxes and panels **upright**



Store in a **cool dry** place, with **no direct sun**.
Avoid **65°C** or greater



Store boxes and panels **flat**




Keep all **surfaces clean** for storage and fabrication



Wear **gloves** for handling **light colours**



Upon delivery, **inspect** all goods for order **correctness** and **damage**



Keep **dry** and avoid **humidity**



Protect the **edges**



sonidoa

PRECISION CUT PANELS


INSTALLATION GUIDE



INSTALLATION

This guide is for a direct fix method with butt joining side by side.

Sonidoa Panel is a non-woven product that can vary by up to 7% in thickness which is a natural characteristic of this material. Vee Groove cuts can therefore vary in depth from panel to panel.

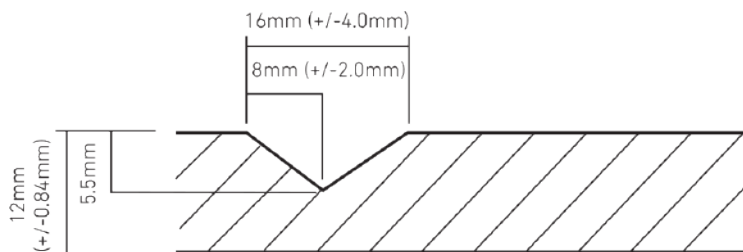


Some grooves may be wider or narrower than others. It is recommended, for continuous application of panels side by side on a wall, these grooves must be assessed by a qualified installer and grouped by groove size and depth for accurate pattern matching.


CUTTING/TRIMMING BY MACHINE

- Sonidoa Panel can be cut on a CNC machine or using a plunge cut circular saw or bandsaw with wave tothing blade and a metal guide.
- Do not use a serrated blade with side-set teeth.
- Trial cut on a scrap piece first, as saws will behave differently on sheets of different thickness and density.
- Feed against the rotation of the blade or tool using a slow, consistent feed rate to prevent overheating.
- A fast feed can cause frictional heat which can melt or fuse the heated contact points with a saw blade.
- Secure sheet whilst cutting to minimise vibration.

CUTTING/TRIMMING BY HAND



- Ensure blade is inserted into panel at 90° to the surface to ensure square edges and best results for butt joints.
- Ensure the blade is sharp and not too long or flexible to avoid skew cuts.
- Replace the blade often to maintain sharpness.

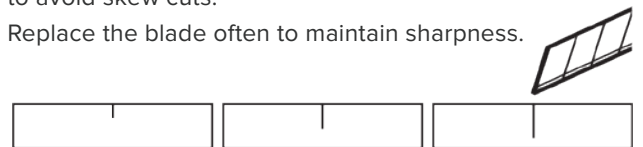

- For best results, use multiple cuts and light pressure.
- Keep flat and use a backing mat.
- Use a secure straight edge for straight cuts.

FIXING & ADHESIVES

- Sonidoa Panel can be direct fixed with a commercial adhesive. It is the installer's responsibility to ensure the adhesive used is appropriate for the product and substrate it is being fixed to.
- Prepare the site with a clean drop sheet and place the panels face side down on the floor.
- Ensure the wall or ceiling surface is clean and free of dust or imperfections that could prevent adhesion. Industry standard of drywall Level 3 is recommended.
- Panels may easily flex. To avoid creasing, ensure they are well supported by a minimum of two people when

positioning vertically to the substrate.

Although there is no set formula for fixing spans, it is reasonable to expect that fixing between 450mm to 600mm centres both vertically and horizontally would cause the panel to remain rigid in most circumstances.

- Adhesives should be used as per the manufacturer's instructions, and it is advised to perform a test piece prior to full installation.
- When using adhesives, position the panel to the substrate and apply even gentle pressure. Ensure to use minimum pressure at the edges to avoid adhesives showing.

sonidoa

CARE & CLEANING GUIDE

Sonidoa Acoustic products are extremely durable and require little attention to maintain their good looks. Light vacuuming on a regular basis will prevent dust build up, and most marks can be cleaned with a mild detergent solution followed by rinsing and blotting. Stains should be dealt with according to the chart below.

Before carrying out a proposed cleaning method, patch test on a concealed section to ensure it will not affect the adhesive or product. Avoid severe abrasion. Spot clean only. Vacuum to restore pile, but do not use a stiff brush.

Sonidoa Acoustic products are designed with good health and hygiene in mind and can be disinfected to prevent germs and pathogens. Sonidoa Acoustics recommends disinfecting product surfaces using isopropanol (isopropyl alcohol) or ethanol diluted to 70 percent with water. Disinfectants containing quaternary ammonium compounds may also be effective.

Wall and Ceiling products will need to be removed from the ceiling or wall to clean safely. Disassembly instructions can be found in individual product Install Instructions. We do not recommend using solvent-based solutions on Sonidoa Acoustic products.

Sonidoa Acoustics recommends that you contact professional cleaning experts if you require further assistance with the cleaning and maintenance of Sonidoa Acoustic products. For further enquiries contact your Sonidoa Acoustics account manager. The treatments listed above are intended as general guidance only. Results may vary, depending on variables beyond the control of Sonidoa Acoustics. Sonidoa Acoustics accepts no responsibility or liability for any loss or damage that may arise from the implementation of the treatments listed below.

Always read the directions for use on cleaning product labels to avoid poisoning or injury. Never mix cleaning products, doing so can result in poisonous fumes and serious breathing problems. Ventilate your work area well by opening a window or door and running an exhaust fan. Always wear rubber gloves, safety goggles, and protective clothing when using very strong cleaners.



sonidoa

CARE & CLEANING GUIDE

CLEANING

Warning: Do not saturate Sonidoa with water or other cleaning liquids.

REGULAR CLEANING:

- Protect from direct sunlight.
- Vacuum regularly using low suction and smooth attachment.
- Professional cleaning recommended.
- Do not use dishwashing or laundry detergents, only use upholstery detergent.
- Allow to dry away from direct heat thoroughly before re-use.

SPOT CLEANING:

- Treat spills and stains as soon as possible.
- Avoid concentrated rubbing and use minimal pressure only.
- Gently scrape soil or mop liquid from the surface of the fabric, do not scrub.
- Apply proprietary cleaning agents strictly according to instructions to remove the residue of the spill.
- Dry cleaning solvent can be used for spot cleaning.
- Ensure adequate ventilation if the product is likely to be subject to excessive moisture.

DISINFECTING

The Department of Health (2020) suggests the use of a disinfectant for which the manufacturer claims antiviral activity, such as commonly used chlorine-based disinfectants like household bleach with active ingredient Sodium Hypochlorite or hospital grade disinfectants with active ingredient Benzalkonium Chloride.

A variety of strengths of household bleach are available. The concentration of active ingredient can be found on the product label. The Department of Health (2020) recommend using a 1000ppm (0.1%) bleach solution.

For example; White King Premium Bleach has a concentration of 4.0% Chlorine, so to achieve a 0.1% bleach solution, you would use 1 part bleach to 39 parts water, or 250ml bleach in standard 10L bucket of water.

PREPARATION AND USE OF BLEACH SOLUTION:

Bleach solutions should be made up daily using manufacturer's instructions for appropriate dilution and use. Using a disposable paper towel or cloth, wipe the cleaned surface of Sonidoa with bleach solution. Sufficient time is required to kill the virus, i.e., at least 10 minutes contact time. Appropriate personal protective equipment (PPE), such as gloves and protective eye wear, should be worn when Handling and preparing bleach solutions or disinfectants.

USE OF DISINFECTANT WIPES:

Using a disposable disinfectant wipe with active ingredient Benzalkonium Chloride 0.47% w/w, wipe the cleaned surface of Sonidoa. Sufficient time is required to kill the virus, i.e., at least 10 minutes contact time.

sonidoa

CARE & CLEANING GUIDE

Our products are extremely durable and require little attention to maintain their good looks. Light dusting on a regular basis will prevent dust build up and most marks can be cleaned with a mild detergent solution followed by rinsing and blotting. Stains should be dealt with according to the chart below.

Before carrying out a proposed cleaning method, apply to a concealed section to ensure it will not affect the product or adhesive. Avoid cleaning methods that create severe abrasion. NB: Solvent and mineral based cleaners should be used sparingly to avoid possible degradation of the adhesive adhering the product to the substrate.

Professional Cleaning Methods

Stain	Treatment Guide
Blood	A, C
Burn/Scorch Mark	K
Chewing Gum	I, B, D, C
Chocolate	B, D, C
Cooking Oils	B, D, C
Crayon/Colour Markers	B, D, C
Drinks	A, C
Dust/Dirt Vacuum, then	J or C
Excrement	B, C
Grass	C
Grease	B, D, C
Ink (ballpoint)	D, E
Ink (fountain)	A, C
Lipstick	B, E, C, D
Mildew	C
Milk	A, E
Mud	B, C
Nail Polish	A, G
Oil	B, D, C
Paint (water based)	A, F, C
Paint (oil based)	A, H, D, C
Sauces	B, C, D
Shoe Polish	B, C, D
Urine	A, C
Vomit	A, C, D
Wine	A, Add Salt, C

Key

- A** Mop up excess as soon as possible with a sponge or cloth.

- B** Remove surplus with a knife edge or appropriate instrument.

- C** Sponge with a solution of carpet shampoo working from well outside the stain in a circular motion towards the centre (this avoids spreading the stain). Sponge afterwards with clean warm water and mop excess moisture with a clean dry cloth or sponge. Allow to dry then brush gently with a soft brush. If any stain remains, sponge with a solution of one part household bleach to six parts clear water. Thoroughly rinse after treatment.

- D** Lightly sponge with household dry cleaning fluid and blot. Apply sparingly, as the substance may have an adverse effect on the adhesive.

- F** Lubricate the stain with glycerine or petroleum jelly.

- E** Sponge with methylated spirits and blot dry.

- G** Apply nail polish remover. The nail polish remover should not include lanolin or be of a greasy nature.

- H** Sponge with turpentine (or substitute).

- I** Freeze with ice cubes and scrape away while cold.

- J** Clean with regular extractive carpet cleaner (if possible).

- K** Use circular cutter and remover damaged portion. Re-glue new piece into place.

sonidoa
COLOR SWATCHES



SA - P101



SA - P102



SA - P103



SA - P104



SA - P105



SA - P106



SA - P107



SA - P108



SA - P109



SA - P110



SA - P111



SA - P112

sonidoa
COLOR SWATCHES




SA - P113



SA - P114



SA - P115

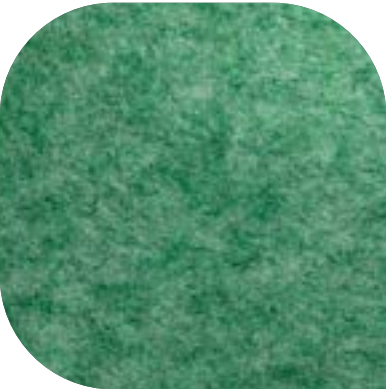

SA - P116



SA - P117



SA - P118



SA - P119



SA - P120



SA - P121



SA - P122



SA - P123



SA - P124

sonidoa
COLOR SWATCHES



SA - P125



SA - P126



SA - P127



SA - P128



SA - P129



SA - P130



SA - P131



SA - P132



SA - P133



SA - P134



SA - P135



SA - P136

sonidoa
COLOR SWATCHES




SA - F303



SA - P601



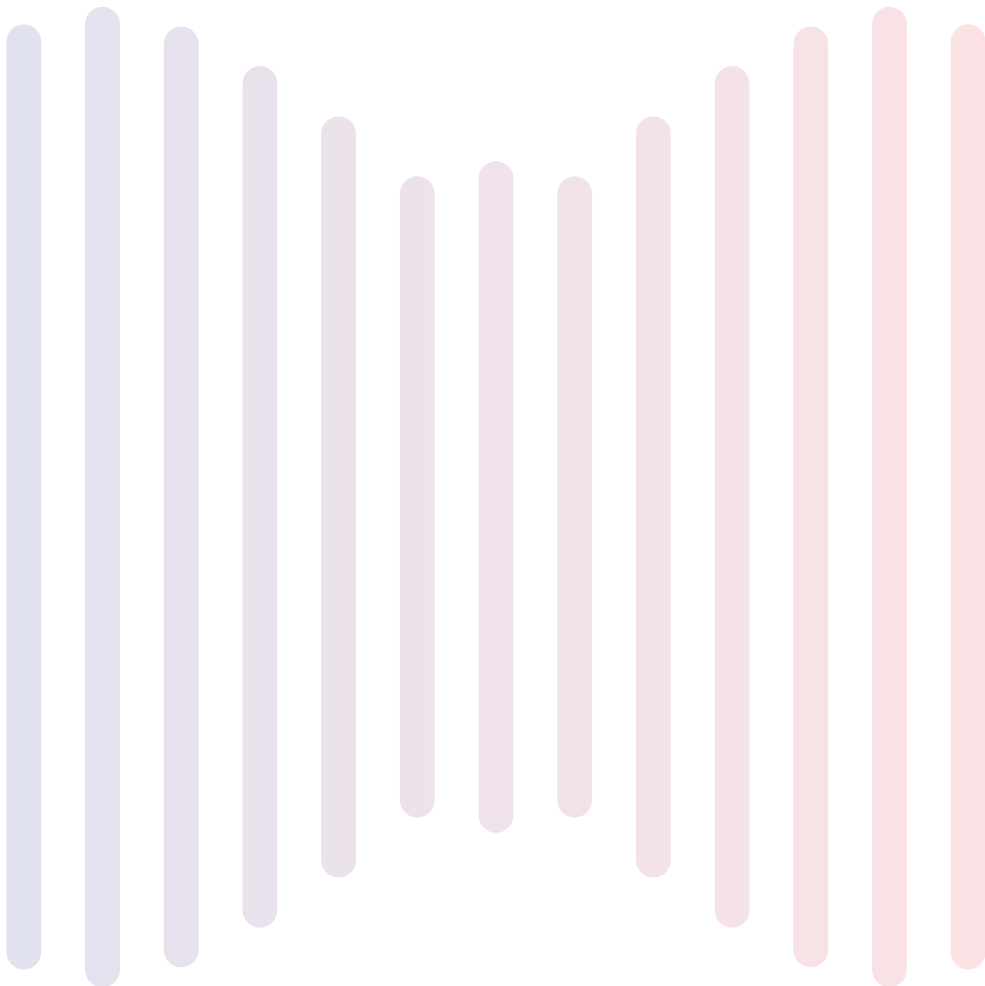



Call: +91 95609 98915
Email: sales@sonidoa.com
Web: www.sonidoa.com

Corporate Office:
Unit #203, 2nd Floor, Ninex Time
Centre, Golf Course Road, Suncity,
Sector 54, Gurugram - 122003

Factory:
F-218, Khushkhera Industrial Area,
Bhiwadi, Rajasthan - 301707